


FirstDuoDL



FirstDuoDL

First Duo DL is a solid downlight for creating clean and flush suspended ceilings. The die-cast aluminium body makes the luminaire strong and firm – great cooling capacity increases lifetime.

Color Rendering: CRI > 90, CRI > 80
 Reflector: COB 1206 : 10 °, 24 °, 30 °, 50 ° /
 COB 1212 : 20 °, 40 °, 60 °
 Color options: Black, White, Silver
 Color temperature CCT: 2700K, 3000K, 3500K,
 4000K, 5000K
 Cooling: Passive
 Material: Powder painted die-cast aluminium
 Wattage: Up to 1 x 50 W (module)
 Lifetime: 50.000 hours
 Installation: Spring mounted, no tools required
 Color consistency: MacAdams 2 SDCM
 Guarantee: 5 years (LED Chip & driver)
 Dimmable: Available upon request
 LED chip: Citizen
 Protection: IP20
 Cut out: 180 x 355 mm

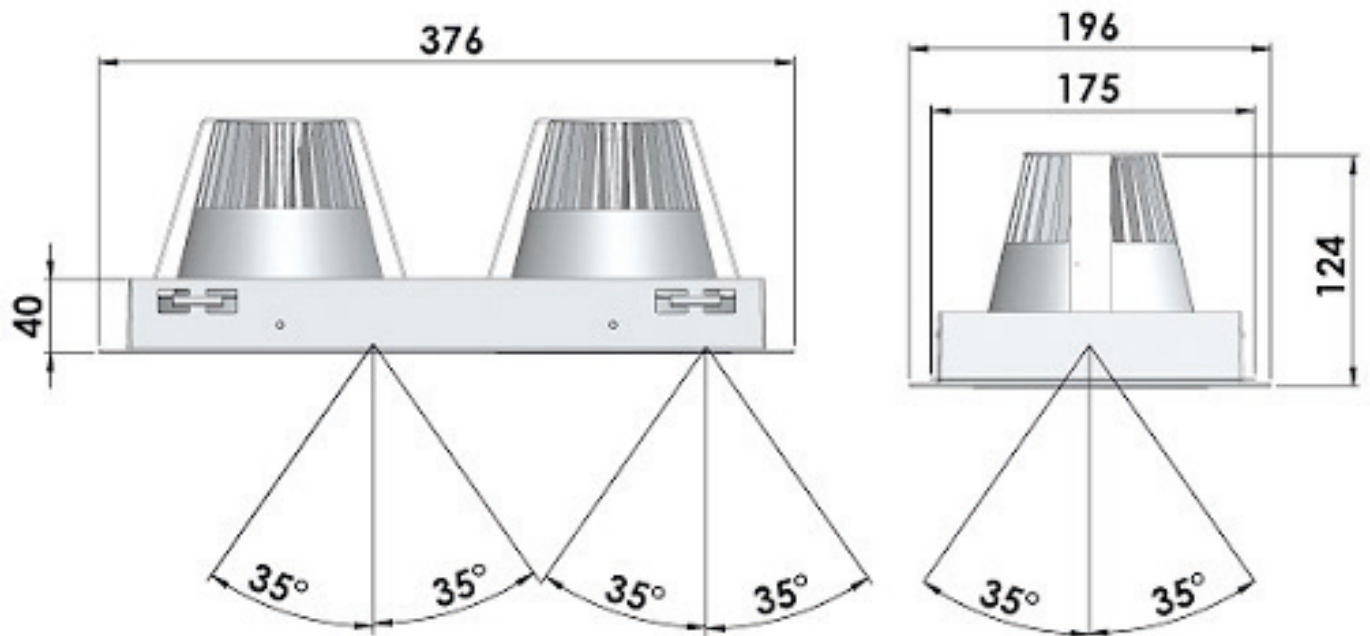

Cut out: 180 x 355 mm