


OnPanel

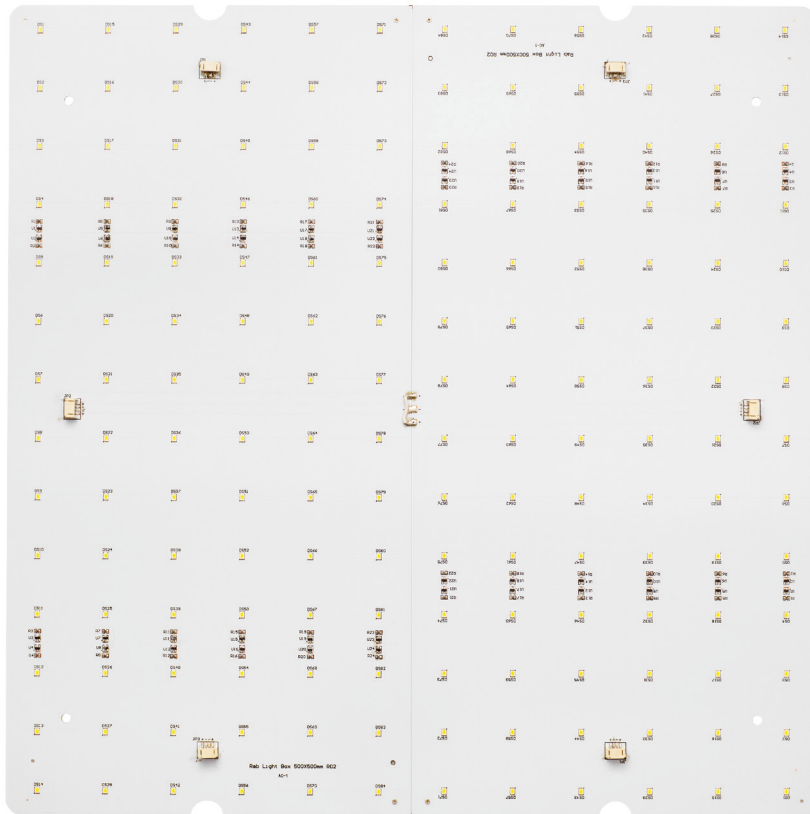

OnPanel

OnPanel is a high efficient LED panel for application as a backlight behind posters or as ceiling light behind diffusers.

The panel modules can be combined in groups for creating large homogeneous light emitting areas.


LM/W: 150lm/W
EFFICAY: 150lm/W
CCT: 4500K
CRI: >80Ra

OnPanel

ON PANEL - SPECIFICATIONS

ART.NO	PRODUCT	DIMENSION	WATT	LUMEN
ELIFF00011LED	ON PANEL LED MODULE 590X568MM 24V 15,5W 150LM/W CRI>80 4500K	590X568MM	15,5W	2325LM
ELIFF00021LED	ON PANEL LED MODULE 567X490MM 24V 11,3W 150LM/W CRI>80 4500K	567X490MM	11,3W	1695LM
ELIFF00031LED	ON PANEL LED MODULE 582X488MM 24V 12W 150LM/W CRI>80 4500K	582X488MM	12,0W	1800LM
ELIFF00041LED	ON PANEL LED MODULE 532X488MM 24V 11,3W 150LM/W CRI>80 4500K	532X488MM	11,3W	1695LM
ELIFF00061LED	ON PANEL LED MODULE 300X600MM 24V 9,1W 150LM/W CRI>80 4500K	300X600MM	9,1W	1365LM
ELIFF00071LED	ON PANEL LED MODULE 500X500MM 24V 10,5W 150LM/W CRI>80 4500K	500X500MM	10,5W	1575LM
ELIFF00081PCB	ON PANEL LED MODULE 1000X250MM 24V 10,5W 150LM/W CRI>80 4500K	1000X250MM	10,5W	1575LM
ELIFF00091PCB	ON PANEL LED MODULE 500X125MM 24V 2,7W 150LM/W CRI>80 4500K	500X125MM	2,7W	405LM

OnPanel

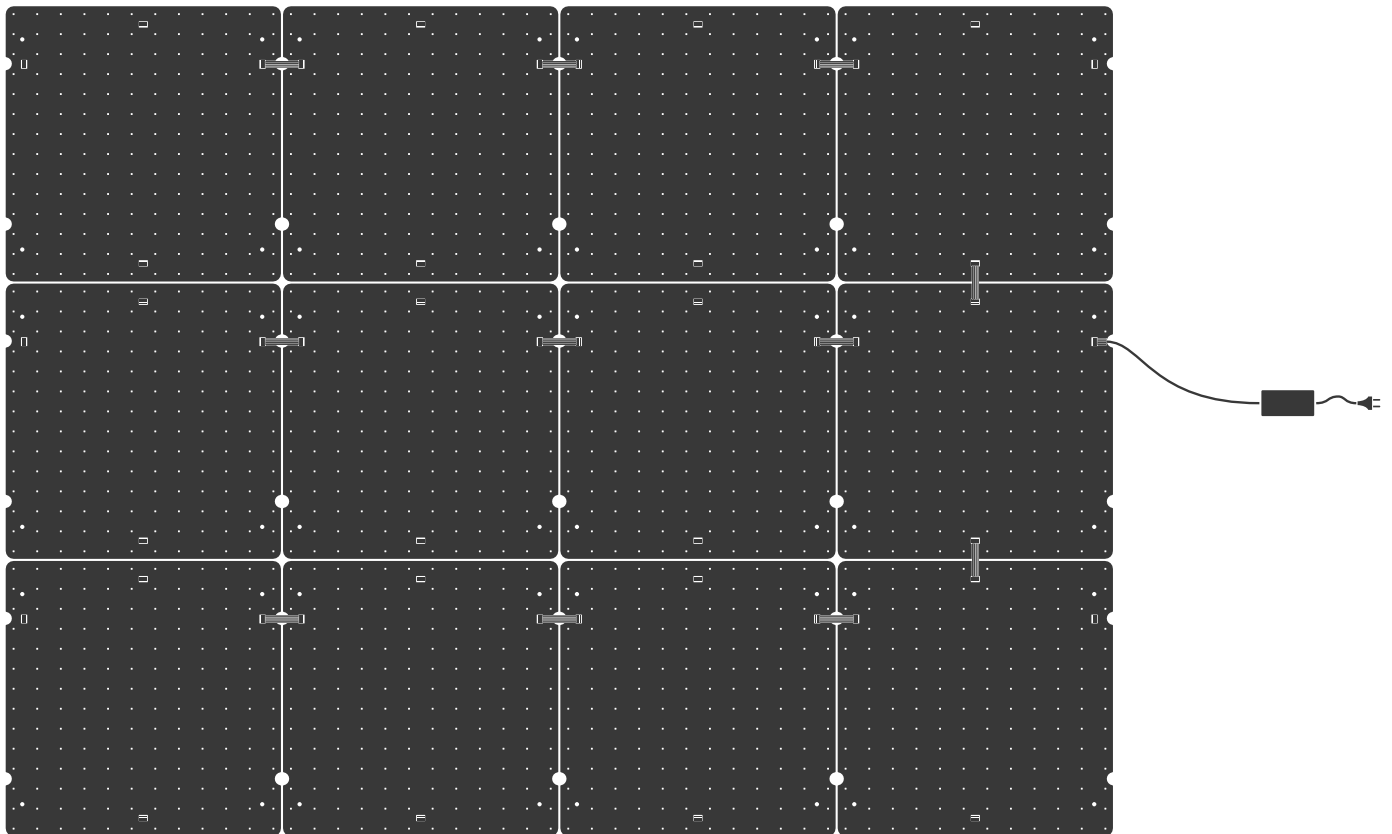

Installation

Each panel is provided with connection cables to other panels.

OnPanel

ON PANEL - DRIVERS AND CABLE ACCESSORY

ART.NO	PRODUCT	INPUT	OUTPUT	MAX LOAD	LENGTH	WIDTH	HEIGHT
ELSNP50-24VF1	Snappy driver 50W 180-264Vac, 24V 159x59x18 CV	180-264V	24V	50W	159mm	59mm	18mm
ELSNP75-24VLA	Snappy Driver 75W 180-264Vac, 24V 200x63x30	180-264V	24V	75W	200mm	63mm	30mm
ELSNP100-24VLUE	Snappy Driver 100W 100-240Vac, 24V 180x65,5x31,2	100-240V	24V	100W	180mm	65,5mm	31,2mm
ELSNP150-24VL	Snappy Driver 150W 200-240Vac, 24V 180x65,5x31,2	200-240V	24V	150W	180mm	65,5mm	31,2mm

ELIFFC4400	Connection cable 400mm, 22# white. For connecting driver and panel.				400mm		
EL1500050	Cable AC 230V 2000mm 2x0,75mm ² , PVC Black, EU Plug				2000mm		
EL1500033	Cable AC 230V 3000mm 2x0,75mm ² , PVC Black, EU Plug				3000mm		
ELLOZHB1703152	Cable AC 230V 2000mm 3x1,5mm ² , ZH Black, open both ends,				2000mm		
ELLOZHB1703153	Cable AC 230V 3000mm 3x1,5mm ² , ZH Black, open both ends				3000mm		

NB: ELIFFC4400 Connection Cable is required for connection to driver