

FIRST SINGLE


Datasheet

FIRST SINGLE is a tilting downlight that comes in a classic, square design. The high-performing luminaire offers flexibility in lighting design and can be used either as general lighting or for creating accent lighting.



HIGH
EFFICIENCY

Color	Beam Angle	CCT	System flux	System power	Other technical characteristics
●	10°	2700K	3090lm (3000K)	25,4W (650mA)	
●	24°	3000K	3265lm (4000K)		
○	30°	3500K			
	50°	4000K			

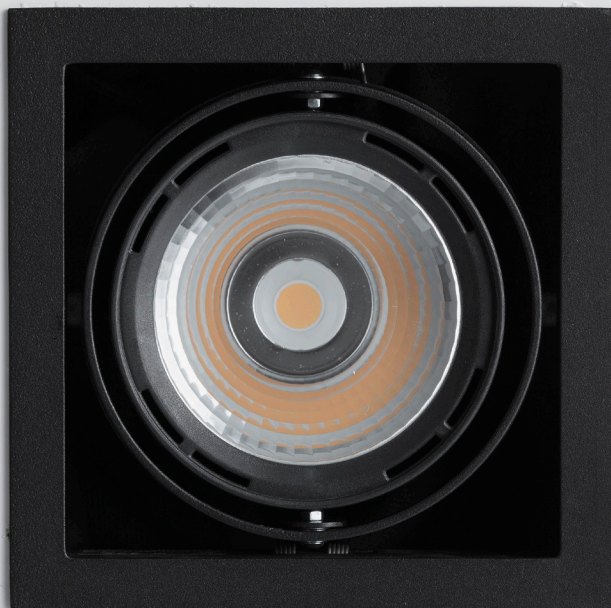

Color Rendering:
CRI > 90

Material:
Die-cast aluminium

Lifetime:
50.000 hours L80B10

Color consistency:
MacAdams 2 SDCM

Guarantee:
5 years (LED Chip & driver)

Installation:
Spring mounted, no tools required

Cut out Ø:
180 x 180 mm

LED chip:
Philips

Protection:
IP20

Dimmable:
Casambi, DALI

Certifications:
CE